

INSTALLATION METHOD FOR ALTERNATOR BRACKET

PCE232.1031



REMOVAL PROCESS

CAUTION: Disconnect the battery before disconnecting electrical components.

Remove the existing alternator and bracket.

NOTE: Make sure to clean the threaded holes to ensure bolts fasten without resistance.

NOTE: This alternator bracket is designed to work with GM alternators only.

INSTALLATION PROCESS

1. Use the figures below to install the alternator bracket.
2. Once desired belt is meant, fasten all the bolts.

CAUTION: Once one heat cycle has been completed, check bolts again. Fasten if they were loosen.

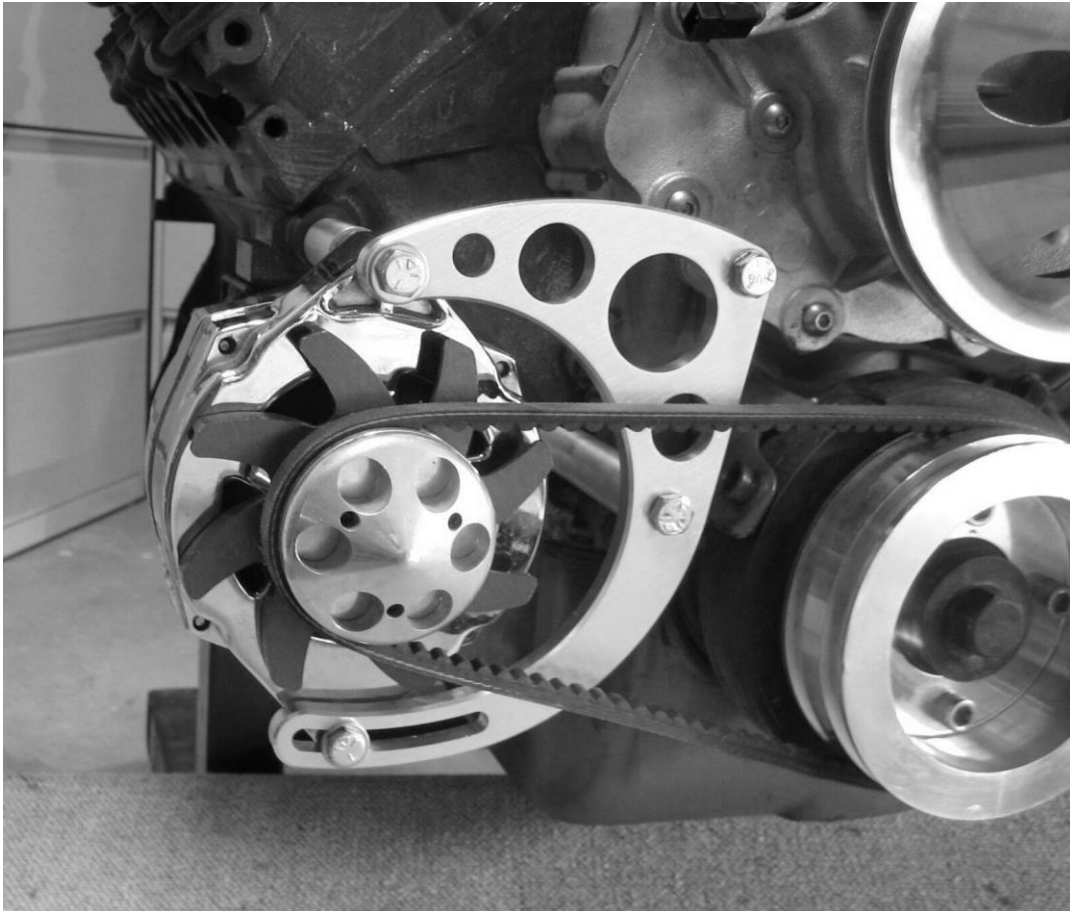


Figure 1: Front View

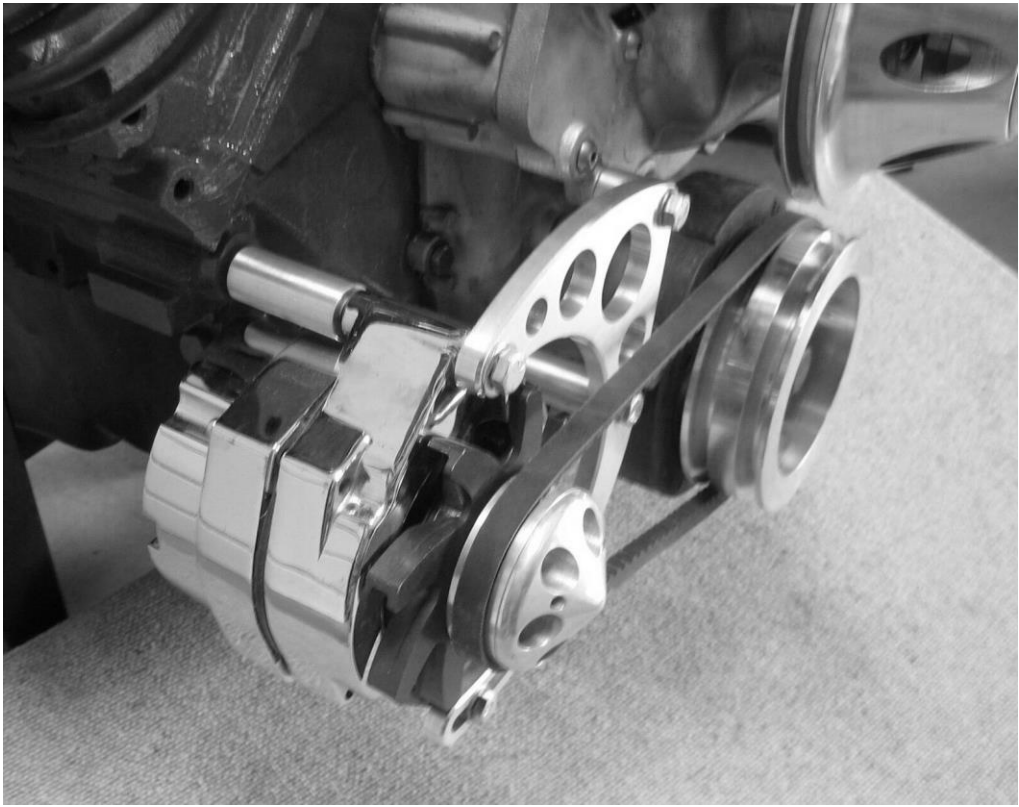


Figure 2



Figure 3



Figure 4

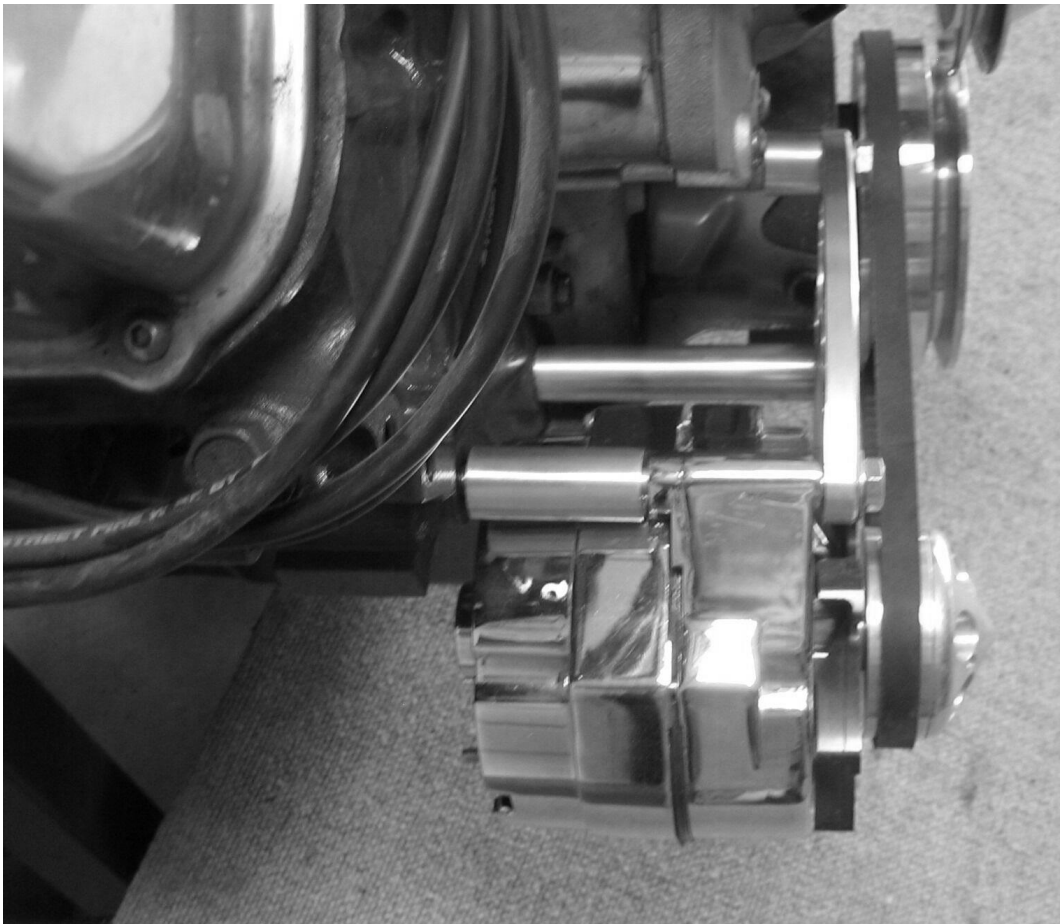


Figure 5: Side View



Figure 6: Exploded View